**MDE Series**
Molding Power Inductors
Size 1265

**FEATURES**

- 
- 
- ℃
- 
- 
- 
- 
- 

**APPLICATION**

- 
- 
- 
- 
- 
- 

## Dimensions: [mm]

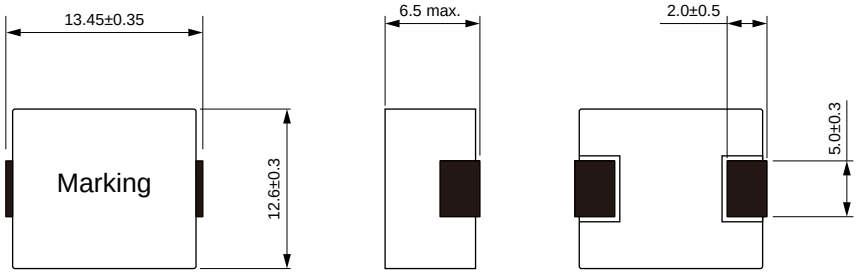


## Land Pattern: [mm]




## Electrical Properties:

| | (μH) | | (mΩ) | Saturation | |
|---|---|---|---|---|---|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

Saturation Current will cause L to drop approximately 30%
Temperature Rise Current: The actual value of DC current when the temperature rise is △T=40°C

**KOHER Electronic**
**4546 BATES DRIVE, YORBLINDA CA 92886 USA**
**714-325-4789 Contact@kohergroup.com**