

MDTA Series

Flat Wire Molded Inductor

Size 6060



- FEATURES
- Flat wire coil for low copper losses
 -
 -
 - High current capacity
 - AE
 -
 -
- Temperature rise

°C


Current

A

- APPLICATION
- Noise suppression for motor windings / power seats /
 -
 -

Dimensions: [mm]

Land Pattern: [mm]

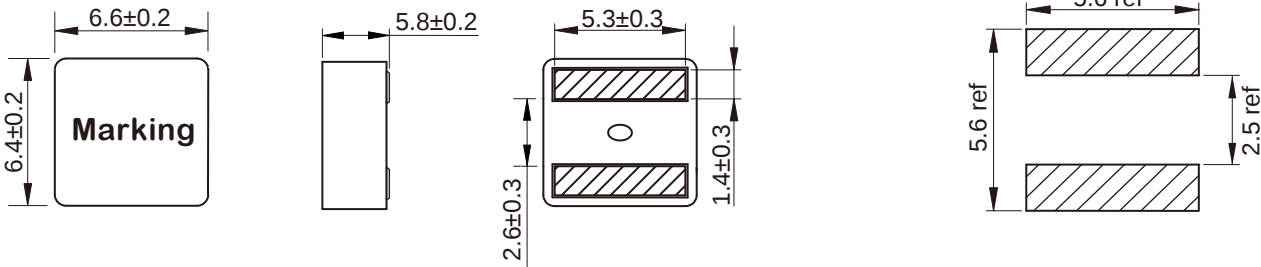


Electrical Properties:

Part No	L@100KHz /0.1V (μH)	Tolerance	I _{SAT} Typ. (A)	I _R (A)		R _{DC} Max. (mΩ)
				20°C rise	40°C rise	
		±20%				
		±20%				
		±20%				
		±20%				
		±20%				
		±20%				
		±20%				
		±20%				
		±20%				
		±20%				
MDTA6060-220M	22	±20%				

Saturation Current will cause L to drop approximately 30%
 Temperature Rise Current that causes the specified temperature rise from 25°C ambient.

Soldering Reflow:

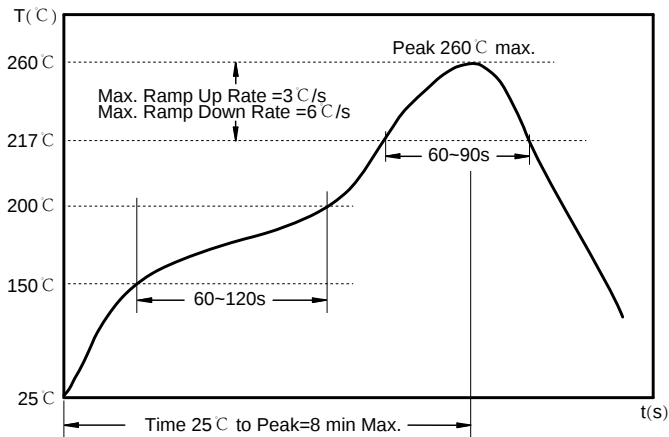

Preheat condition: 150 ~200 °C / 60~120 sec.

Allowed time above 217 °C : 60~90 sec.


Max temperature: 260 °C .

Max time at max temperature: 10 sec.

Allowed Reflow time: 2x max.


Packaging Information:

Tape Dimension :

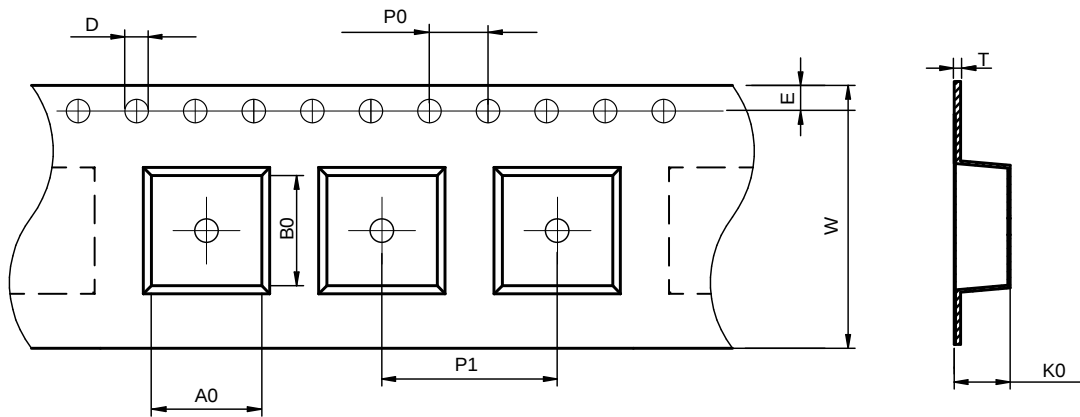

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
MDTA6060	7.0 ± 0.1	6.8 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	12.0 ± 0.1	16.0 ± 0.3	6.3 ± 0.1	1.75 ± 0.1	0.50 ± 0.05

Peel force of top cover tape:

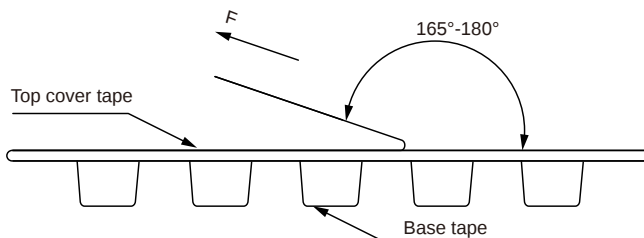


The peel force of top cover tape shall be between 0.1 to 1.3 N

Product Marking:

Marking	Printing Inductance)
---------	----------------------

Reel Dimension: [mm]

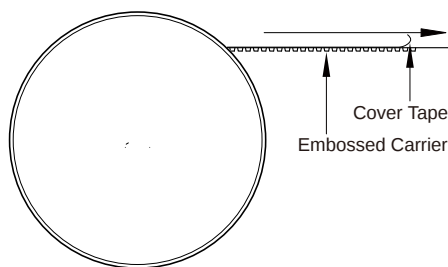

Embossed CarrierC53rl 12093.7 l21c6223.79-9q 1c6223.79-95.19-9M T2.29-209 87.1729 0 01 9-25729 0 209 -l3.2729 0 07 0 2

Packaging Quantity: