



SPM Series



CHARACTERISTICS

- Large current, Low DC-resistance, High efficiency by magnetic metal powder
- Low acoustic noise and low leakage flux noise by shielded construction
- Operating temperature: -40°C ~ 125°C
- Quantity: 3000 pcs/reel
- AEC-Q200 qualified

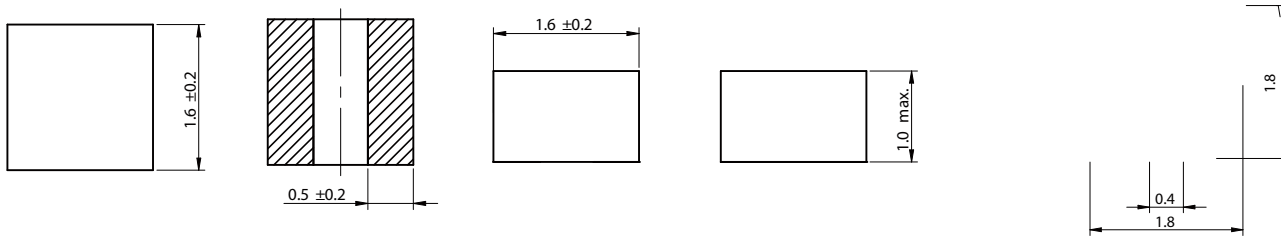

Part No	Inductance	Tolerance	Temperature Rise Current Max.	Current Max.	DCR Max.	DCR Typ.
SPM1610-R33N	0.33	± 30%	1.90	4.20	84	65
SPM1610-R47N	0.47	± 30%	1.70	3.90	101	77
SPM1610-R56N	0.56	± 30%	1.65	3.50	113	90
SPM1610-R68N	0.68	± 30%	1.55	3.30	126	101
SPM1610-R82N	0.82	± 30%	1.45	2.90	144	115
SPM1610-1R0N	1.0	± 30%	1.40	2.70	159	127
SPM1610-1R2N	1.2	± 30%	1.30	2.60	174	140
SPM1610-1R5N	1.5	± 30%	1.10	2.40	237	189
SPM1610-2R2N	2.2	± 30%	0.90	2.00	388	337

Temperature rise current: the actual value of DC current when the temperature rise is T_{40C}
 Saturation Current that will cause initial inductance to drop approximately 20%

