

WI Series
SMD Power Inductor
Size 3225

CHARACTERISTICS


-
-
-

APPLICATION

-
-
-


Dimensions: [mm]

Land Pattern: [mm]



Electrical Properties:

Soldering Reflow:

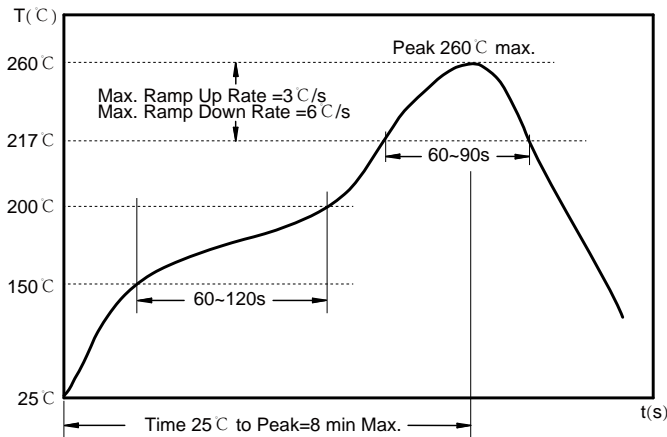


Preheat condition: 150 ~200 °C / 60~120 sec.

Allowed time above 217 °C : 60~90 sec.

Max temperature: 260 °C .


Packaging Information:

Tape Dimension :

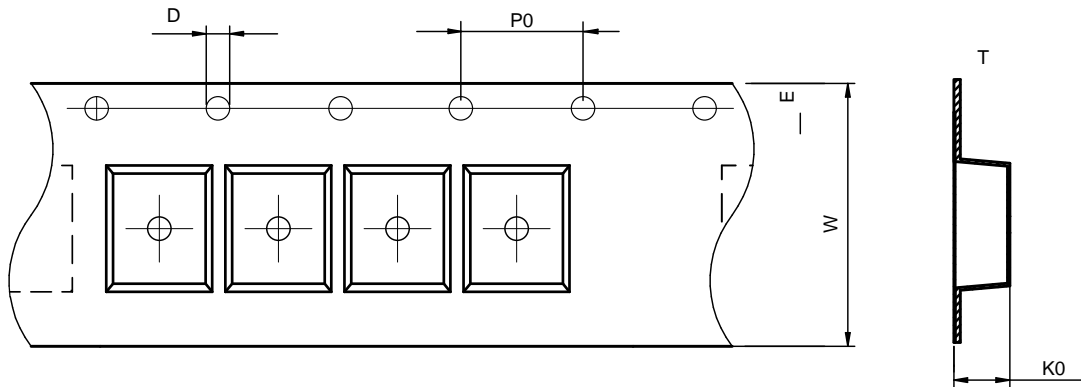

| Series | A0 (mm) | B0 (mm) | D (mm) | P0 (mm) | P1 (mm) | W (mm) | K0 (mm) | E (mm) | T (mm) |
|--------|----------|----------|---------|---------|---------|---------|---------|----------|-----------|
| WI3225 | 2.75±0.1 | 3.50±0.1 | 1.5±0.1 | 4.0±0.1 | 4.0±0.1 | 8.0±0.3 | 2.3±0.1 | 1.75±0.1 | 0.25±0.03 |

Peel force of top cover tape:

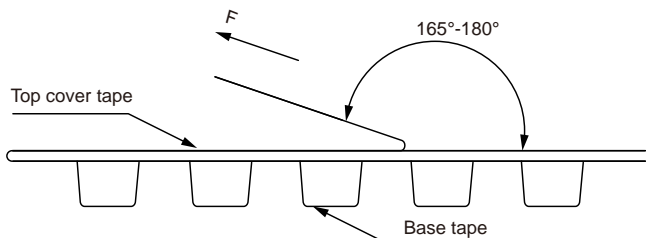

Product Marking:

| | |
|---------|-----------------------|
| Marking | Printing (Inductance) |
|---------|-----------------------|

Reel Dimension: [mm]

Packaging Quantity:

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the terminal electrodes may deteriorate.The warranty period is one year.
-
-
-

Operation Instructions:

-
-
-
-