

WWCI Series
SMD Wire Wound Ceramic Inductor
Size 0603

CHARACTERISTICS


- ± 0.5% tolerance at 25°C, 100kHz
- U = 100VDC
- 0.5% tolerance at 25°C, 100kHz
- j = 0.5%

APPLICATION

- = 7

Dimensions: [mm]


Land Pattern: [mm]

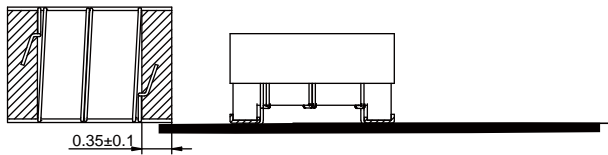

Electrical Properties:

Typical Electrical Characteristics:

Inductance VS. Frequency Characteristics:

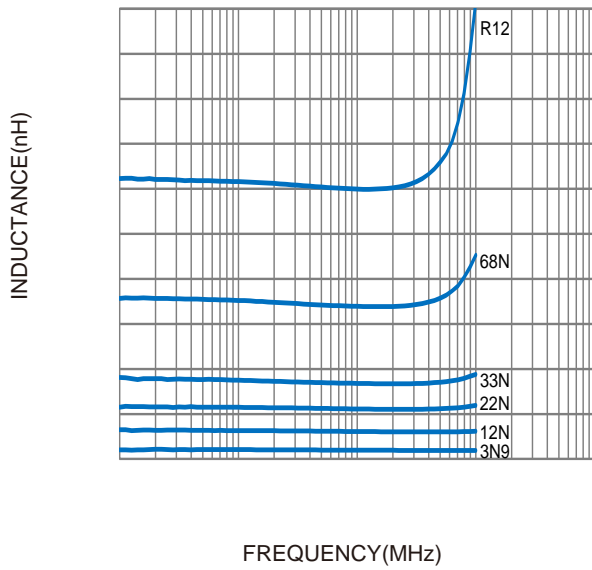

Temperture Rise VS. Frequency Characteristics:

